

### Flowflake Terroso



#### Description

Flowflake Terroso contains varying sizes of flakes scattered over a pigmented epoxy base coat and finished with a tough resistant clear sealer.

#### Uses

Ideal for dry process areas, public areas, shops, showrooms, department stores, designer outlets, restaurants, garden centres, airports, schools and hospitals.

#### Benefits

- Attractive decorative finish
- Extensive design potential
- Seamless hygienic finish
- Easy to clean and maintain
- High chemical resistance
- High scratch resistance
- Wear resistant surface for wheeled traffic

#### Project References

Available on request.

#### Standard Colour Chart



Cream 111 (RAL 9010 pigment)



Beige 112 (RAL 9010 pigment)



Red 311 (RAL 9010 pigment)



Blue 511 (RAL 5023 pigment)



Light Grey 711 (RAL 9010 pigment)



Signal Grey 712 (RAL 7004 pigment)




Mid Grey 713 (RAL 7004 pigment)



Dark Grey 714 (RAL 7024 pigment)

#### System Design

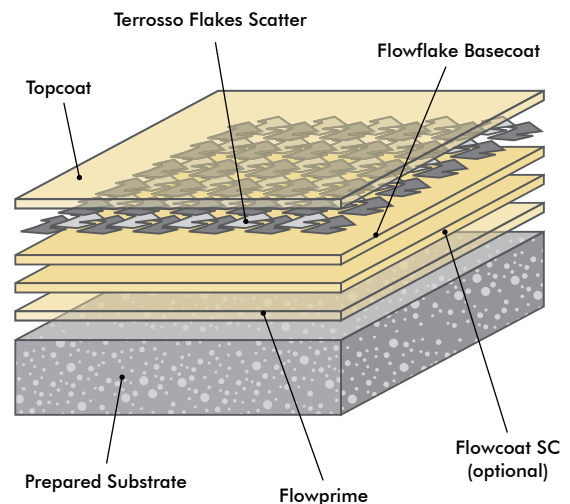

Available in 1 - 3 mm and 5 - 7 mm flake sizes.

The applied colours may differ slightly from the examples shown above. Contact our customer services for a true colour sample or a special colour match.

## Model Specification

Product: Flowflake Terroso  
Finish: Dependant on specification  
Thickness: Dependant on specification  
Colour: \_\_\_\_\_  
Preparatory work and application in accordance with suppliers instructions.  
Manufacturer: Flowcrete Middle East FZCO  
Telephone : Customer Service +971 4 886 4728

## Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/mm<sup>2</sup>, free from laitance, dust and other contamination. The substrate should be dry to 75% RH as per BS8204 and free from rising damp and ground water pressure.

## Products Included in this System

Flowprime  
Flowcoat SC (optional)  
Flowflake Basecoat  
Terroso Flakes  
Topcoat\*

\*Topcoats may vary dependant on the environmental condition. Please consult Technical Department for more details.

Detailed application instructions are available upon request.

## Installation Service

The installation should be carried out by a Flowcrete approved applicator with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our website at [www.flowcrete.ae](http://www.flowcrete.ae)

## Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during the manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

## Focus on the Floorzone

Flowcrete Middle East FZCO is a division of the Flowcrete Group, world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing and corrosion protection systems... to name just a few. Our corporate objective is to satisfy your flooring needs.

## Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

Fire Resistance	B <sub>i</sub> -S <sub>1</sub> (EN 13501)
Slip Resistance	TRRL Pendulum Slip Test Dry >40 Wet dependant on specification

Textured systems are recommended to meet slip resistance value requirements for wet conditions and/or surface contaminants (wet or dry) - please contact our Technical Advisors for further details and specifications.

Abrasion Resistance	BS8204:Part 2:2002 Class AR2 -Medium duty industrial and commercial
Temperature Resistance	Tolerant of sustained temperatures up to 60°C
Water Permeability	Nil – Karsten test (impermeable)
Chemical Resistance	Contact Technical Department
Impact Resistance (ISO 6272)	1 kg weight > 1.8 m 2 kg weight > 1.5 m
Flexural Strength	15 N/mm <sup>2</sup> (BS 6319)
Tensile Strength	10 N/mm <sup>2</sup> (BS 6319)
Bond Strength	Greater than cohesive strength of 25 N/mm <sup>2</sup> concrete. >1.5 MPa.

## Speed of Cure (per layer)

	10°C	20°C	30°C
Light Traffic	36 hrs	24 hrs	16 hrs
Full traffic	72 hrs	48 hrs	36 hrs
Full chemical cure	12 days	7 days	6 days

## Aftercare - Cleaning and Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

## Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

## Further Information

To ensure you are specifying a fit for purpose flooring for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.